

# MD Divider Valves

## DESCRIPTION

Trabon® MD Divider Valves are designed for use with series progressive oil and grease lubrication systems. They are of two piece, steel construction with O-ring seals. MD Valves will serve either 2, 3, 4, or 6 points of lubrication.

The 2, 3, and 4 point divider valves require .080 in.<sup>3</sup> to complete one full cycle. An MD-2 divider valve will divide this volume into two outputs of .040 in.<sup>3</sup>. An MD-3 divider valve will divide this volume into two outputs of .020 in.<sup>3</sup> and one of .040 in.<sup>3</sup>. An MD-4 will divide this volume into four outputs of .020 in.<sup>3</sup>. An MD-6 divider valve requires .060 in.<sup>3</sup> to complete one full cycle and will divide this volume into 6 outputs of .010 in.<sup>3</sup> each. See figure 1.

## FEATURES

- Delivers metered amount of lubricant.
- Economical and compact design.
- Simple to install on new or existing machines.
- Has fitted pistons in honed bores.
- Bolt together construction with O-ring seal between sections.

## OPERATION

The MD Divider Valve is a self-contained, multiple outlet, series progressive valve. The term progressive means that each piston completes its stroke, discharging a measure amount of lubricant to the lube point it serves before the following piston operates. As long as lubricant is supplied under pressure to the inlet section, each piston will continue to operate in a progressive manner. Whenever lubricant flow ceases, the valving pistons will stop. When flow resumes the pistons will start again at the same point in the discharge cycle.



## HOW TO ORDER

Model	Divider Valve	Part Number	
		With Cycle Indicator Pin (Right Side)	With Cycle Indicator Cycle Switch and bracket.
MD-2	103-000-131	103-000-041	510-446-020
MD-3	103-000-141	103-000-051	510-446-030
MD-4	103-000-151	103-000-061	510-446-040
MD-6	103-000-510	N/A	N/A


## Repair Parts

End Plug Ass'y (For Cycle Indicator).....	534-182-002
Indicator Pin.....	527-000-800
Enclosure Plug.....	510-679-005
Enclosure Plug Gaskets.....	510-681-000
Assembly Bolts.....	419-140-040
O-Ring .....	422-010-060
Cycle Switch .....	529-726-001

### Note:



If it is desired to use performance indicators with MD Divider Valves, a tee (Part No. 412-380-010) is required for each outlet.

Figure 1. Lubricant Volume Division.

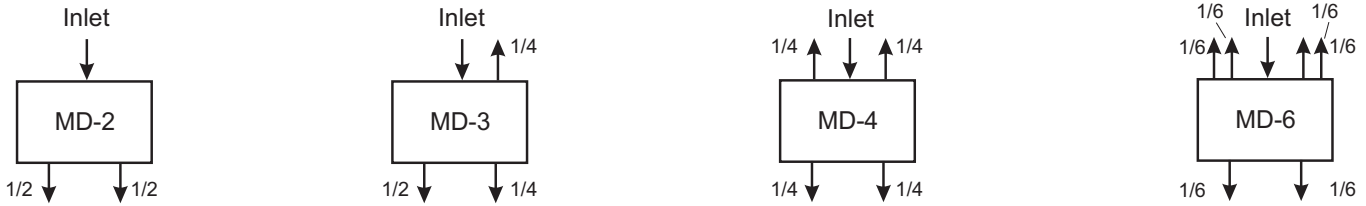

**DIMENSIONS Inches (mm)**

Figure 2. Outline and Mounting Dimensions.

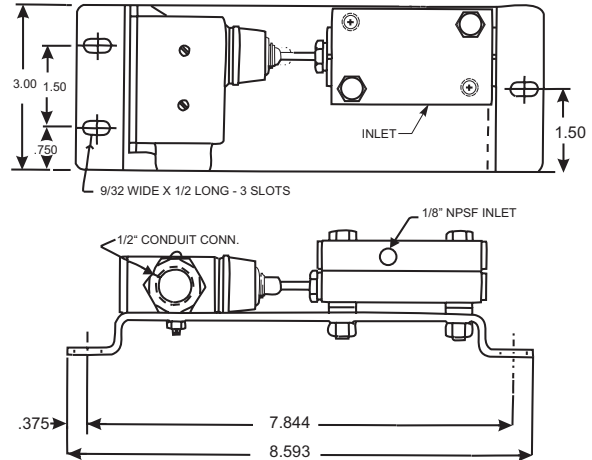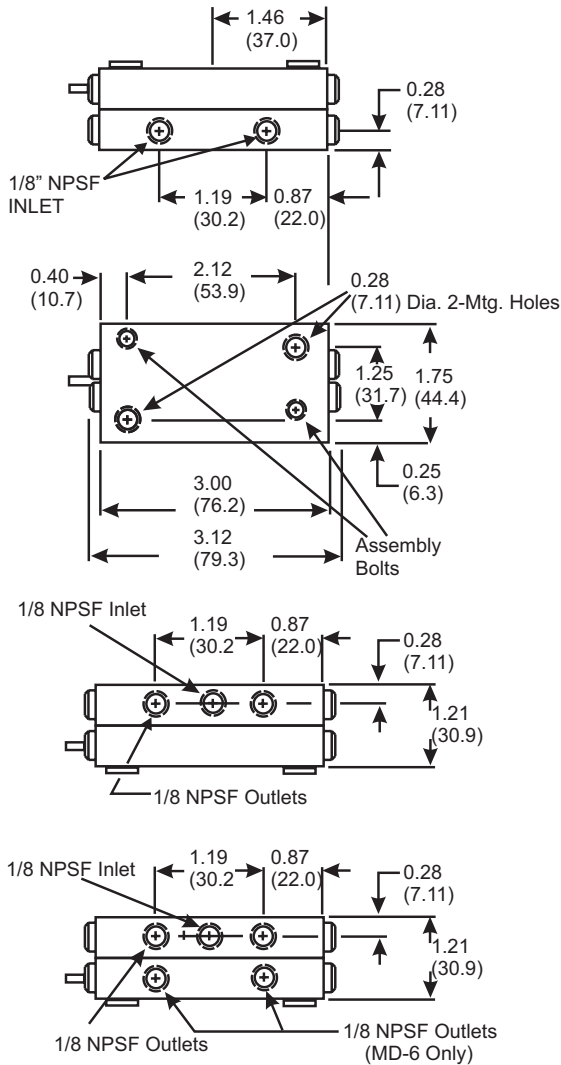

**SPECIFICATIONS**

Material..... Steel  
 Pressure (max.) ..... 3,000 psi (207 bar)  
 Lubricant..... Oil or grease  
 Net Weight (approx.)... 1 lb. 8 oz. (0.68 kg)  
 Cycle Indicator Available.. See How-To-Order

**Volume**

(Lubricant to cycle divider valve one complete cycle)

MD-2, MD-3, & MD-4.....0.080 in.<sup>3</sup> (1.31 ccm)  
 MD-6.....0.060 in.<sup>3</sup> (0.98 ccm)

**Torque Ratings**

Assembly Bolts.....8-9 ft. lbs.  
 Enclosure Plugs.....11-13 ft. lbs.  
 Indicator Plug.....15 ft. lbs.  
 Outlet Plugs.....6-7 ft. lbs.

**Note:** Divider systems should be limited to first and second stages only. Third staging is not recommended. Refer to Trabon bulletins 20101, 20105, and 20115 for further information on system design.

All written and visual data contained in this document are based on the latest product information available at the time of publication. Graco reserves the right to make changes at any time without notice

Call today for product information or to request a demonstration.

**1.800.USA.LUBE** (1-800-872-5823) or visit us at [www.lubriquip.graco.com](http://www.lubriquip.graco.com).

©2006 Graco Inc. Bulletin 10151, August 2004. Printed in U.S.A.

All other brand names or marks are used for identification purposes and are trademarks of their respective owners.

